
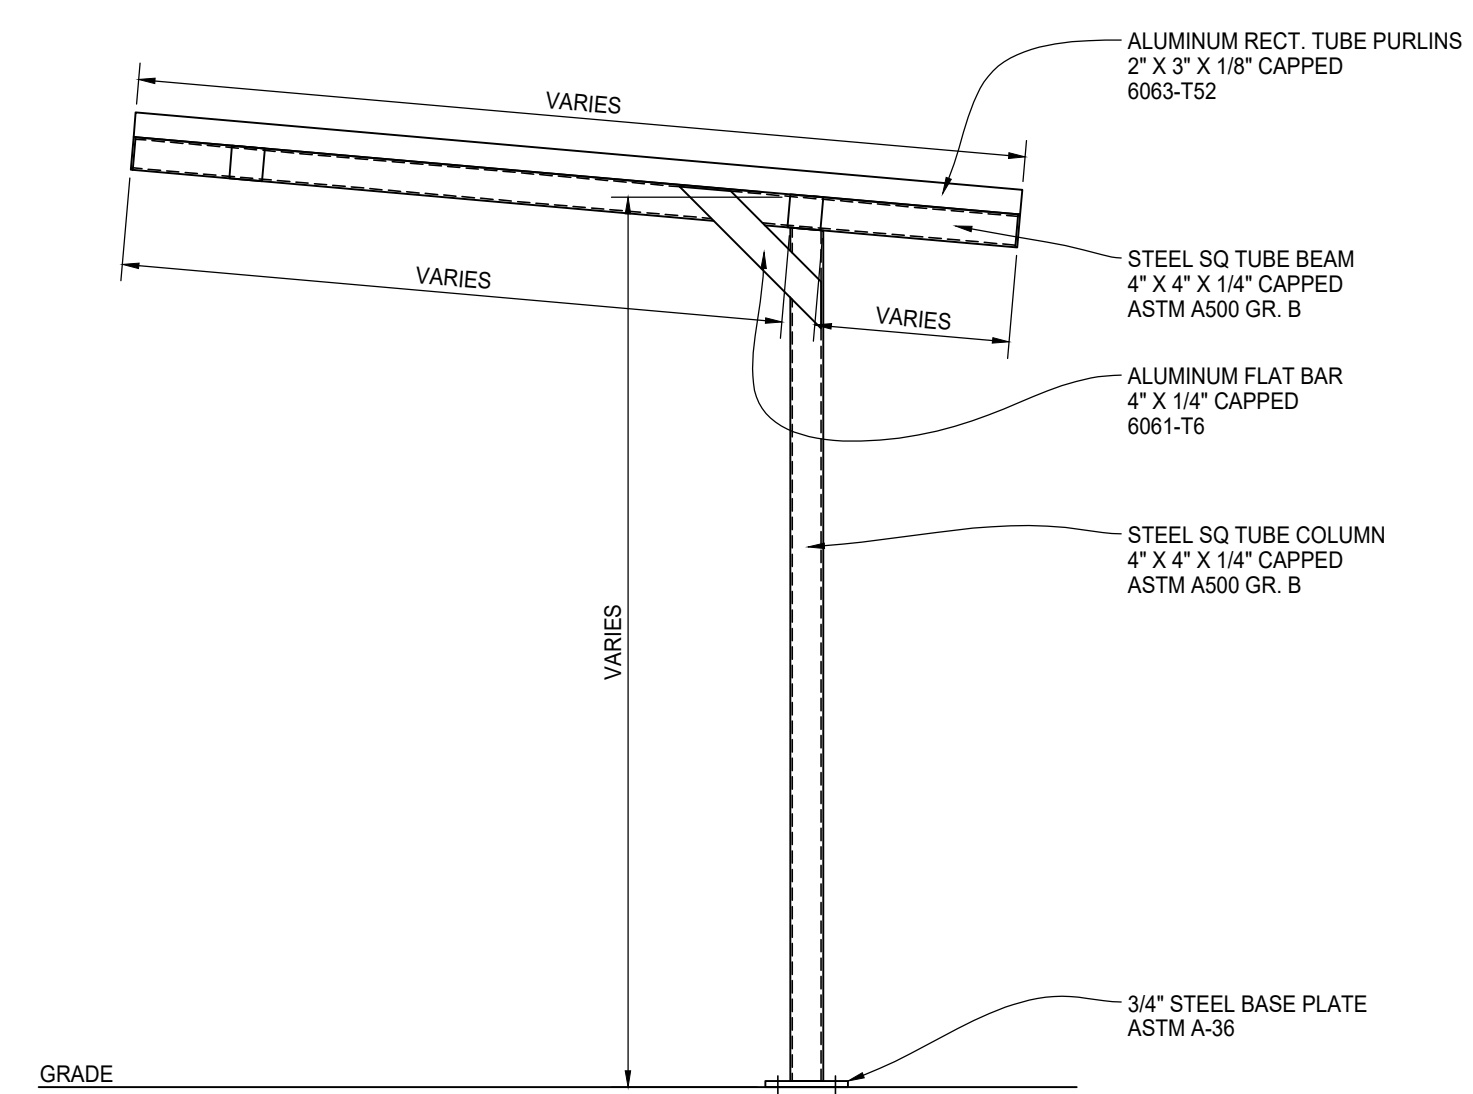


PLAN VIEW

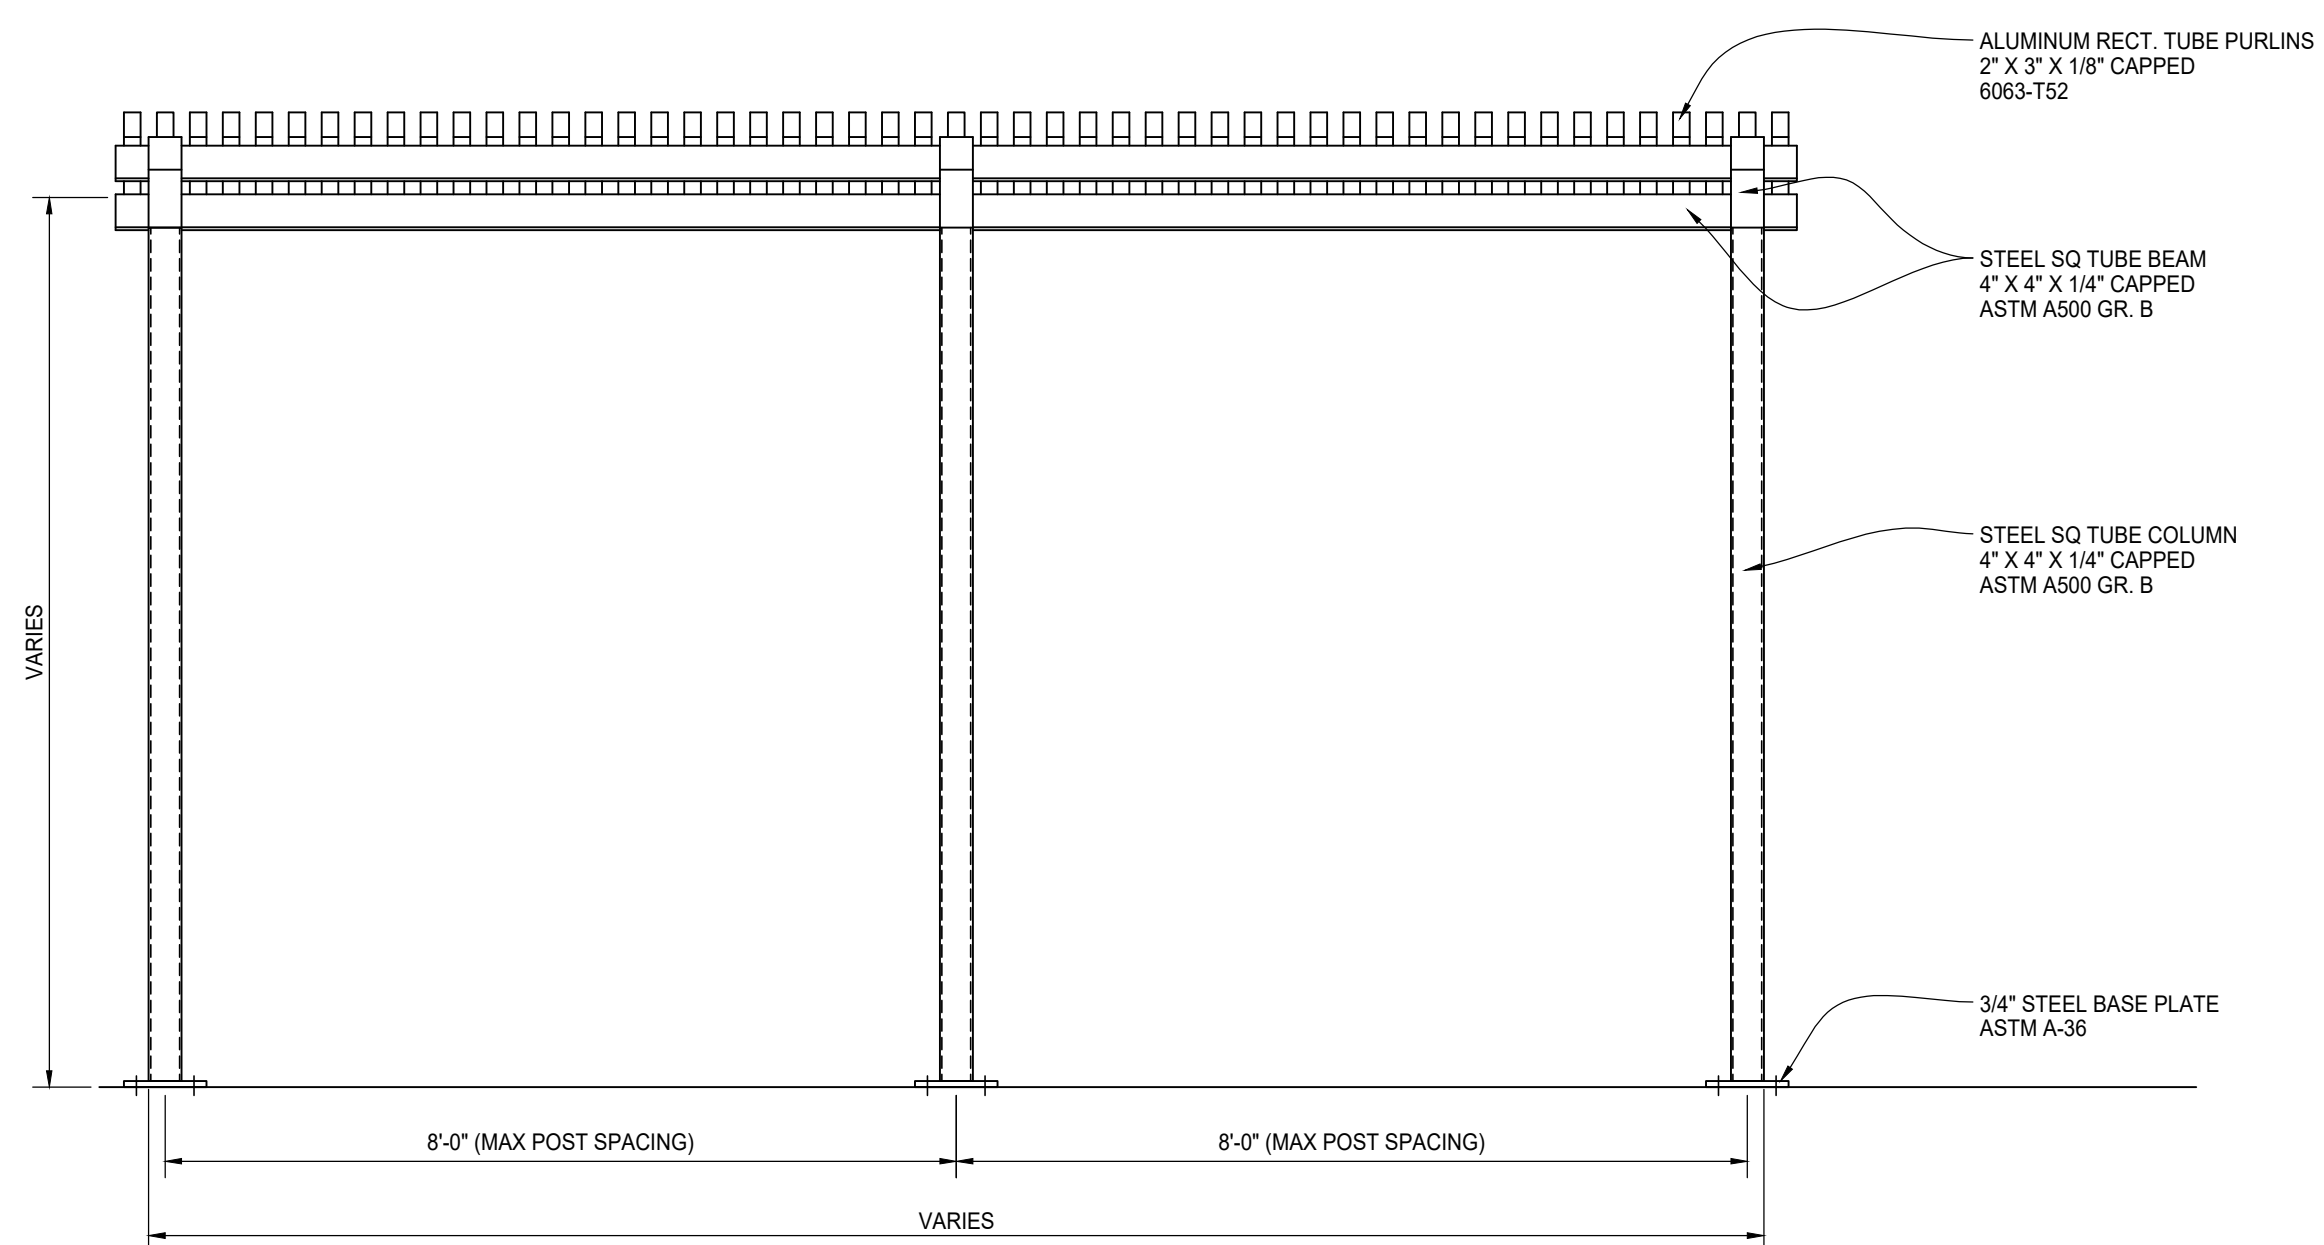

FRONT ELEVATION

**NOTE:**

1) THE PROPOSED DESIGN IS IN ACCORDANCE WITH PALMSHIELD'S STANDARD DESIGN PARAMETERS AND MAY CONFLICT WITH PROJECT PLANS AND SPECIFICATIONS. PLEASE CAREFULLY REVIEW YOUR FABRICATION DRAWINGS FOR ANY CONFLICTS.

2) ANCHORS ARE NOT INCLUDED IN THIS SUBMITTAL. SELECTION OF ANCHORING TO BE BY OTHERS.

3) LEAD TIMES FOR FABRICATION VARY PER BACK LOG AT TIME OF APPROVAL OF DRAWINGS AND/OR RECEIPT OF DOWN PAYMENT. UPON APPROVAL ESTIMATED COMPLETION DATES WILL BE SUPPLIED VIA EMAIL. PLEASE ALLOW AN ADDITIONAL 7± DAYS FOR SHIPPING AS REQUIRED.

4) SYSTEM DESIGNED TO BE INSTALLED ON LEVEL SURFACE. IF GRADE IS SLOPED, ELEVATIONS AT POST LOCATIONS MUST BE PROVIDED TO PALMSHIELD. PALMSHIELD WILL MATCH AS CLOSELY AS POSSIBLE TO THE GRADE ELEVATIONS PROVIDED. SOME SHIMMING MAYBE REQUIRED. SHIMS ARE NOT PROVIDED BY PALMSHIELD.

5) ALL GATE POSTS MUST BE SET TO ±1/8" TO INSURE PROPER FUNCTION

6) INSTALLATION TO FOLLOW MANUFACTURER'S RECOMMENDATIONS. FOR RECOMMENDATIONS PLEASE CONTACT PALMSHIELD.

7) PLEASE NOTE THAT NO MATERIAL PROCUREMENT OR FABRICATION WILL BEGIN UNTIL WE HAVE RECEIVED APPROVED SIGNED DRAWINGS.

8) DRAWINGS APPROVED MORE THAN 14 DAYS AFTER SUBMITTAL WILL BE SUBJECT TO PRICE INCREASE WITHOUT NOTICE.

9) PLEASE REVIEW THIS POST LAYOUT AND ASSOCIATED ANCHOR LOCATIONS. PLEASE ADJUST ALL REBAR FOOTING AND FLATWORK LAYOUTS TO AVOID ANCHOR LOCATIONS. ANCHOR LOCATIONS CANNOT BE RELOCATED ONCE PRODUCT IS FABRICATED.

10) SHIMS ARE NOT INCLUDED IN THIS SUBMITTAL. PALMSHIELD HAS SHIM STACKS AVAILABLE FOR AN ADDITIONAL COST TO PROJECT TOTAL.

11) PLEASE INDICATE THAT THE AREA ON WHICH THE PALMSHIELD SYSTEM IS TO BE INSTALLED IS A LEVEL SURFACE BY INITIALING BELOW.

YES, THE SURFACE IS LEVEL \_\_\_\_\_

NO, THE SURFACE HAS SLOPE \_\_\_\_\_

REV/DESCRIPTION	DATE



**ATEN SUN SHADE**  
**PLAN AND ELEVATION VIEWS**  
**PURLIN INFILL**  
**FINISH TO BE DETERMINED**